


Apple Coax/Twinax Card

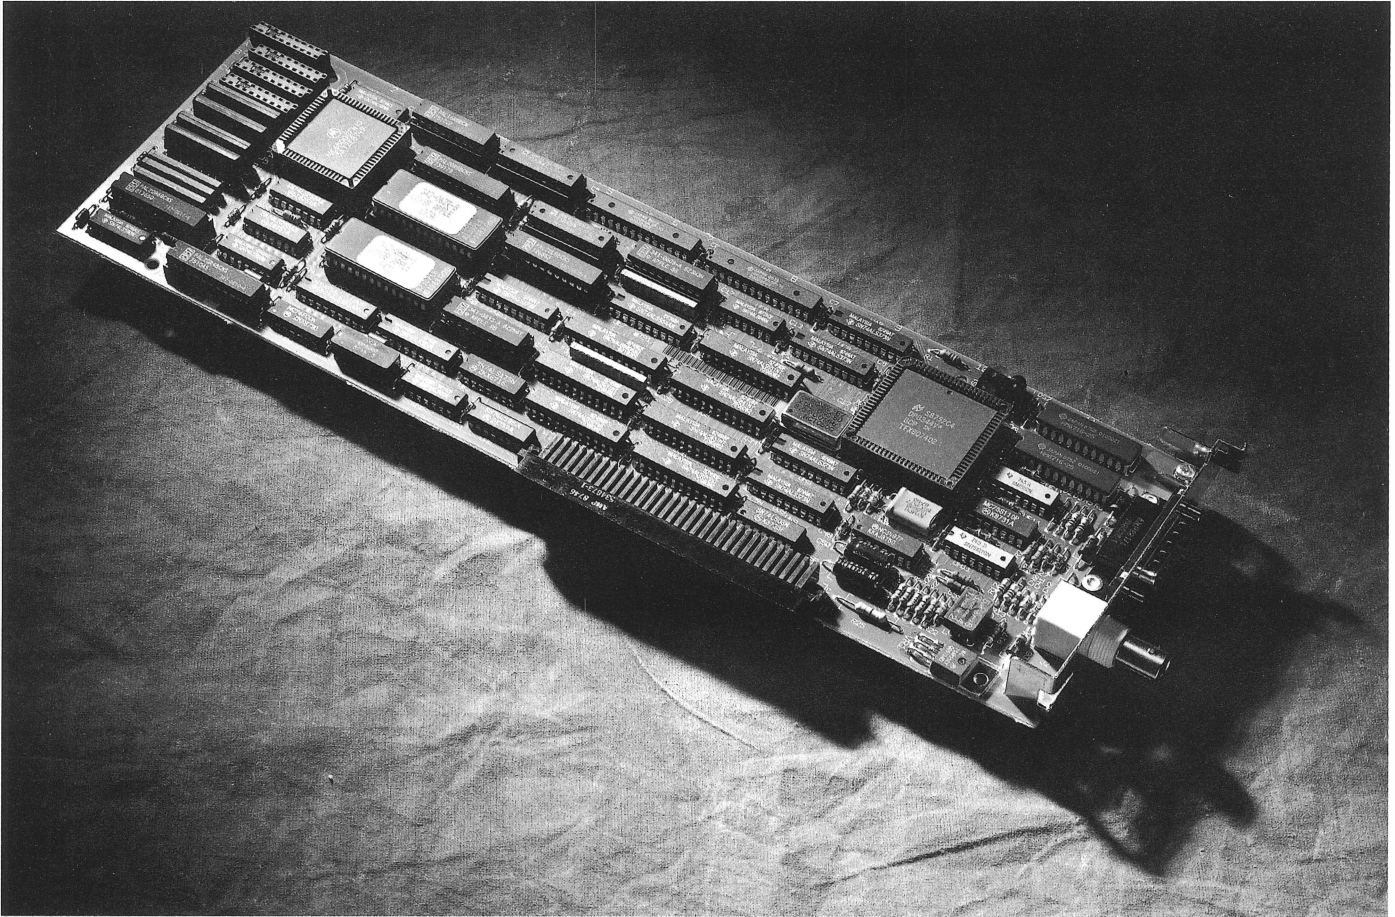

Overview

The Apple® Coax/Twinax Card is an expansion card that allows personal computers in the Macintosh® II family of systems to connect to an IBM SNA network as 3270 Information Display Systems, via industry-standard coax cabling. The card allows users to access mainframe-based 3270 applications in the same manner as they would from a terminal, while enjoying all of the benefits of Macintosh technology for their local applications. The Apple Coax/Twinax Card also has a twinax connector for future 5250 terminal emulation support.

This intelligent NuBus™ interface card has its own 68000

microprocessor, memory, and multitasking operating system. Operating independently of the main Macintosh II processor, the Apple Coax/Twinax Card supports the execution of communications protocols with minimal access to the Macintosh II processor and operating system. And because all of the communications processing is done on the card, Macintosh applications can run more effectively under MultiFinder.™

The MacDFT™ application software works with the Apple Coax/Twinax Card to allow single-session Control Unit Terminal (CUT) emulation or

up to five-session Distributed Function Terminal (DFT) 3270 emulation. Files can be transferred to or from mainframes running VM/CMS or MVS/TSO using the IBM IND\$FILE package.

The Apple 3270 API, a high-level application programming interface, gives application developers a consistent platform for developing customized 3270 applications.

The Apple Coax/Twinax Card offers Macintosh customers Apple support for Macintosh-to-IBM 3270 mainframe applications.



Apple Coax/Twinax Card

Features and Benefits

Features

- ▶ Connection to SNA networks
- ▶ Based on the Macintosh Coprocessor Platform™
- ▶ 512K of RAM, expandable to 1 megabyte

Benefits

- ▶ Allows access to applications and data on IBM mainframes.
 - ▶ Handles all SNA communications processing for the Macintosh II.
 - ▶ Provides support for multiple protocols.
-

System Requirements

To use the Apple Coax/Twinax Card, you'll need:

- ▶ A personal computer in the Macintosh II family of systems
 - ▶ System Software Version 6.0.3 or higher
 - ▶ MacDFT application software
-

Technical Specifications

Connector

- ▶ BNC (coax) and 15-pin D-style (twinax)

Interface

- ▶ NuBus; plugs into any Macintosh II computer

Processor

- ▶ Motorola 68000 running at 10 megahertz

Memory

- ▶ 512K of RAM, expandable to 1 megabyte

Application programming interface

- ▶ Apple 3270 API

Coax support

- ▶ Category A

Power dissipation

- ▶ 10 watts
-

Ordering Information

Apple Coax/Twinax Card

Order No. M0261

With your order, you'll receive:

- ▶ Apple Coax/Twinax Card
- ▶ MacDFT application software (included with the Apple Coax/Twinax Card). Please refer to the MacDFT data sheet (M0064LL/A) for features and product details.
- ▶ *MacDFT User's Guide*
- ▶ Limited warranty statement